



1250H20TL6NB CAT 4

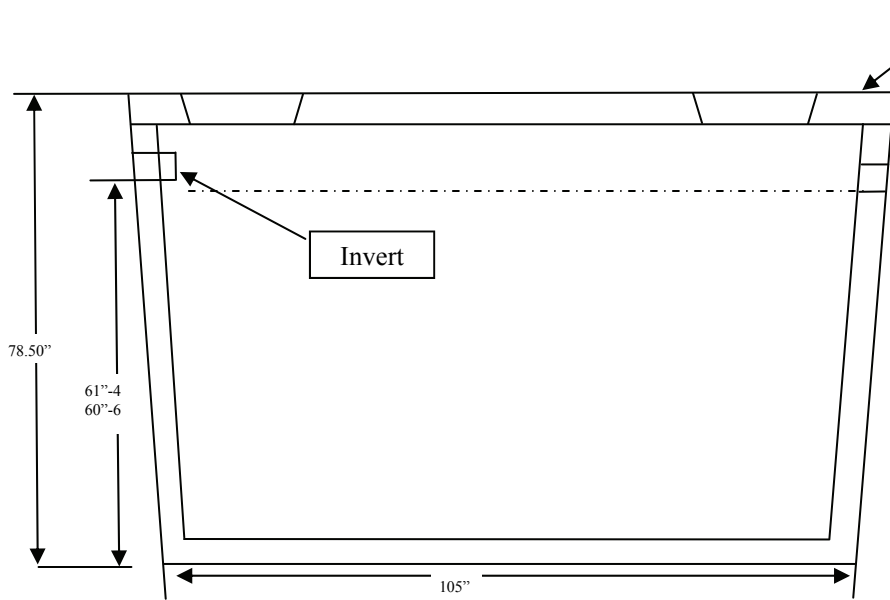


Side View

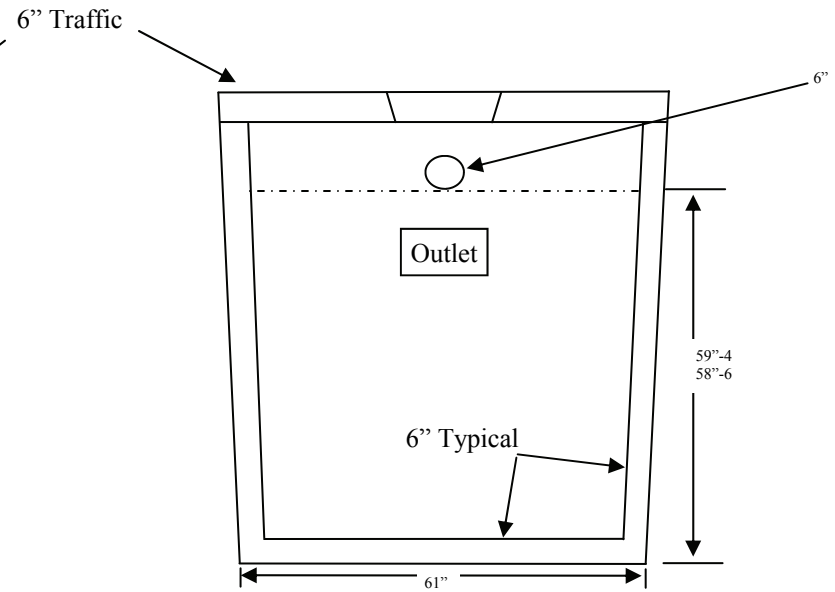

End View

Notes:

1. Receptacle has been designed and tested in accordance with Florida Administrative Code (FAC) 381 Chapter 64E-6 and meets SUA "specifications & Standards" for grease interceptor/septic tanks.
2. Polylok VI High Pressure Closed End Boot Seal (Accepts 4" & 6" Pipe) It also meets ASTM C-923 specifications and can fit in a 3"- 6.5" wall with pipe and tighten take up clamp.

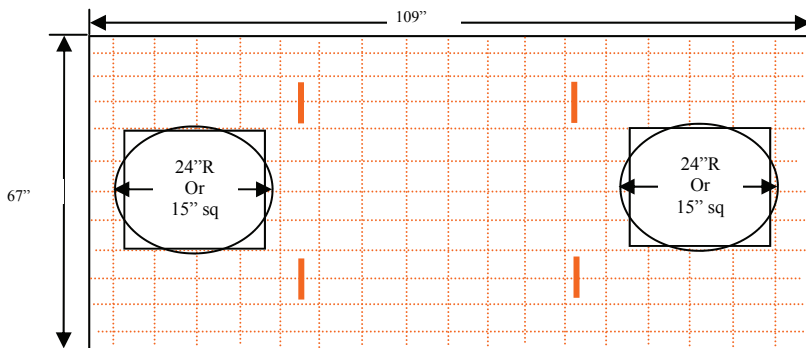

Lid View

Not to scale

Sebring Septic Tank

Big Enough To Serve. Small Enough To Care.

1250H20TL6NB CAT4
State Approval # 28-015-15S-C4

Overall liquid capacity.....1465 Gallons
 Capacity to outlet hole.....1250 Gallons
 Capacity of air space..... 215 Gallons

Concrete @ 4000psi. Air space calculated @ 15% minimum. Steel placement in tank lid, #6 grade 60 deformed rebar 6" OC, both ways. Walls are reinforced with #4 grade 60 deformed rebar 6" OC. Max cover 6"